


## What's in the box

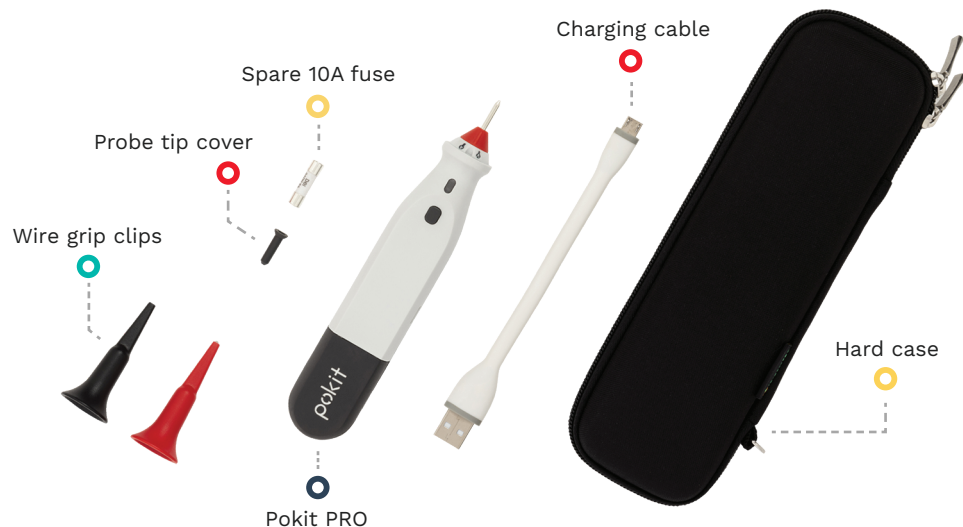

## SPECS

AC/DC Voltage Measurement	10mV to 600V DC, 600V AC (RMS), CAT III, $\pm 1\%$
AC/DC Current Measurement	1mA to 10A $\pm 1\%$
Resistance Measurement	1 to 1M Ohm, $\pm 5\%$
Ambient Temp. Measurement	0 to 60° C $\pm 1^\circ\text{C}$ / 32 to 140F $\pm 2^\circ\text{F}$
Continuity	✓
Capacitance	✓
Diode Check	✓
Sampling	12-bit, 1Msample/s
Digital Fourier Transformer (DFT)	✓
Logging	256kB, 1.8min/sample @ 6 months
Logged Parameters	Voltage, Current, Temperature
Bluetooth Range	10mts / 30ft
Operating Temp.	0 to 60° C / 32 to 140° F
Battery Life	~ 6 Months
Compliance	CE, FCC, RCM, MiC
Lead span	730mm, 28.7"

Learn more [pokitmeter.com/pro](https://pokitmeter.com/pro)

[hello@pokitmeter.com](mailto:hello@pokitmeter.com)

[pokitmeter.com/pro](https://pokitmeter.com/pro)

# pokit PRO

## All-In-One Multimeter, Oscilloscope and Logger

Measurement,  
**Unleashed.**



THE ULTIMATE TOOL FOR MAKERS, ELECTRONICS ENTHUSIASTS AND ENGINEERS



# Transform your smart phone into an awesome tool




Multichannel Digital Storage Oscilloscope

Stand-alone Data Logger

Rechargeable Battery

Smart Watch App

10A, 600V, CAT III

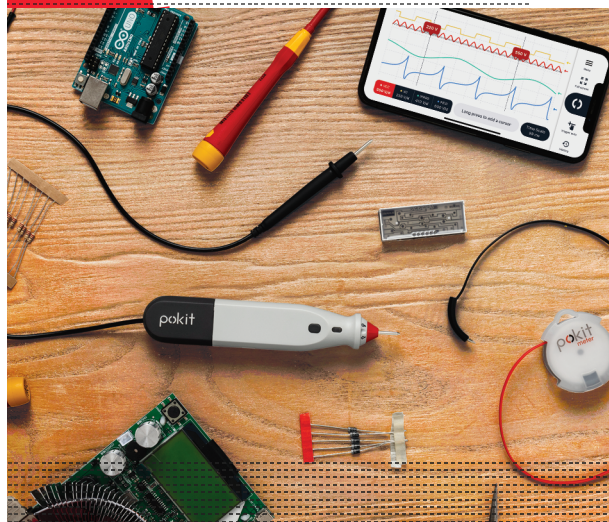

**Pokit PRO** is an all-in-one multimeter, oscilloscope and logger with unprecedented portability, accuracy and versatility. Free yourself from the bench and take your creativity to new places!

**Pokit PRO** is ideal for electronics, automotive applications, home electrical, and much more.

## APP FEATURES


### Multimeter Mode

- DC Voltage
- AC Voltage RMS
- DC Current
- AC Current RMS
- Capacitance
- Resistance
- Continuity
- Diode Polarity
- Temperature
- Log Measurements



### Oscilloscope Mode

- AC/DC Voltage / Current
- AC/DC Coupling
- Spectrum analyzer
- Continuous acquisition
- Triggers
- Cursors
- Scope measurement functions

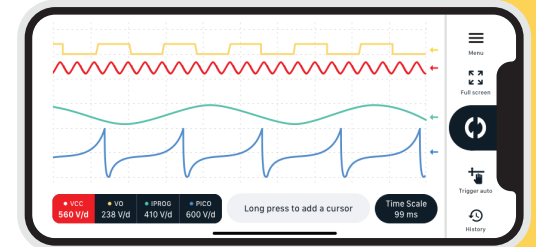

Pinch to drag and zoom, add cursors, measure deltas




Trigger types: auto, rising or falling edge



Save and export measurements to csv

### Logger Mode

- AC/DC Voltage
- AC/DC Current
- Temperature Logging

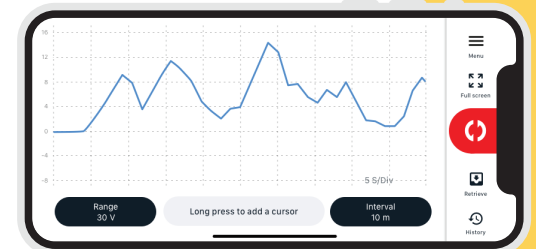

Standalone logger



Pinch to drag and zoom, add cursors, measure deltas



Save and export measurements to csv

[pokitmeter.com/pro](https://pokitmeter.com/pro)